

Mendig - New York - Oklahoma Trip7 (V5.0)

Flight created on 02.04.2020 (Changed 10.02.2025 to V5.0, Mooney Bravo installed.)

This mission only works with P3dV4.

For P3dV5 and P3dV6 download the appropriate version here:

<https://www.andi20.ch/p3d>

Estimated flight duration with AN2 6h (48h all 8 trips)

The An2 flies at 100, the Mooney at 160 KIAS, so all times are shorter by a factor of 1.6.

Level of difficulty easy - difficult (with - without help)

Task: Fly from Mendig (Germany) to Oklahoma (USA).

Introduction

This is the re-enacted flight of “Steel Buddy” Michael, from Mendig to New York and on to Oklahoma, with the old An2 biplane.

Since the AN2 is no longer for sale, here is the alternative version with the Mooney.

If you still own a P3dV4 and have purchased the AN2, you can download an AN2-compatible version at this address:

<https://www.andi20.ch/p3d>

So that some AN2 feeling remains, I'm leaving the help texts and pictures for the AN2.

Adjustments and new features in this version:

1) Pumping fuel:

- The Mooney Acclaim flies the same distance with 18% fuel as the An2 with 90%.

So that you can still enjoy the “pump fuel”, the Mooney Acclaim starts with 28% fuel.

- The Mooney Bravo consumes 70% fuel for the same distance as the AN2 with 90%.

2) Because the Mooney Acclaim is not simulated very realistically, I have added the Mooney Bravo as an alternative aircraft.

- With the Acclaim, the mixture setting has no influence on the engine performance, regardless of the altitude, the mixture can be set anywhere between 6 and 100%.

- The fuel consumption is far too low: fully loaded and with 100% fuel, the Acclaim easily flies from Paris to New York (3150nm) and still has more than 4% fuel in the tank, which is enough for another 150nm. According to the data sheet, only 1400nm are possible.

3) AN2 had neither autopilot nor GPS:

The Mooney has both. The use of both makes the flight easier, but can lead to problems if, for example, GPS steers somewhere other than the air traffic control specifies.

4) Overheating problems and other things that only occur with AN2:
There are no overheating problems etc.

- For the Mooney Bravo I have “artificially” built in an overheating problem:

If you fly for a long time at 100% power, and/or at 100% propeller speed and the cooling air flaps are closed, an oil leak occurs. In this case, you have up to 50 minutes to make an emergency landing somewhere, repair the engine and continue flying.

- The flight with the Mooney Acclaim is unchanged, there is no problem.

5) Now you can fly the flight with the Mooney Bravo a little more realistically.


Ignore the information on power, speed and flap position, they only apply to the AN2.

- Fly at maximum speed, approx. 165 knots and adjust the mixture of the Mooney Bravo according to the altitude.

- Remember to open the cooling air flaps on the Mooney Bravo when setting full power and/or propeller speed.

Info about Mooney Bravo

Overview:

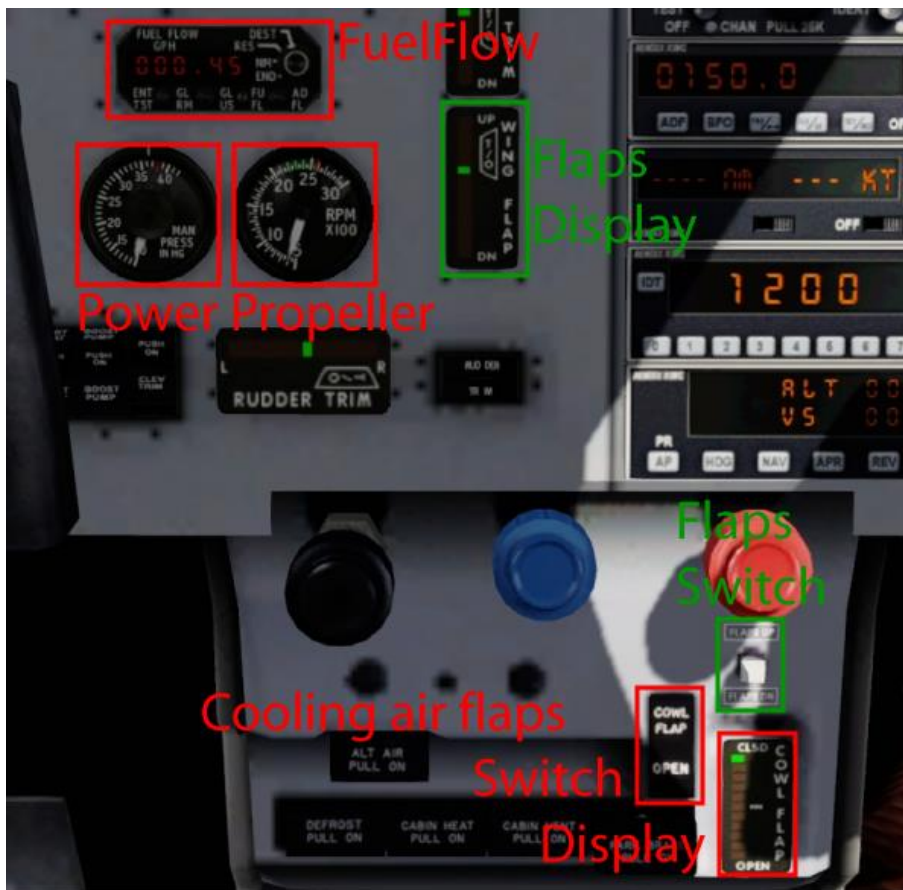


The mixture must be set correctly when climbing. The FuelFlow display helps you to do this. The higher the FuelFlow value, the more optimal the mixture setting.



During take-off and climb, the aircraft is normally flown at maximum power and propeller speed.

Power 100%

Propeller 100%

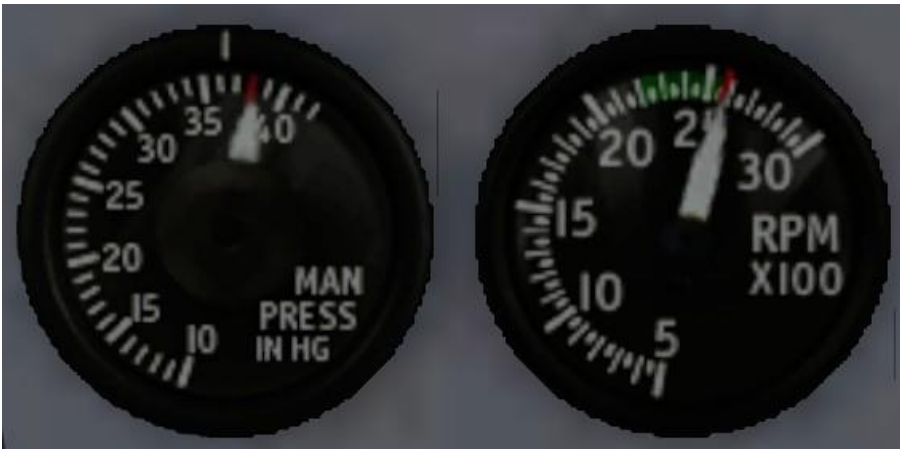

For cruise flight, reduce the propeller speed to the green range and reduce the power.

Power 90%

Propeller 90%



To prevent the engine from overheating, open the cooling air flaps.



The fuel gauge on the Mooney Bravo is based on the same “panic principle” as in a car:

If the needle points to the red area, it suggests a lack of fuel, although you still have plenty of fuel in the tank.

Here is the fuel level, with the corresponding display:

30%

20%



15%



10%



When the needle is at the left stop, there is still 10% in the tank.

It is therefore sufficient to refuel as soon as the needle touches the "E".



Info about Trip 7

At Toni's farm, the auxiliary tanks have been removed and stored in the barn.

While thoroughly cleaning the Antonov, a long-lost item turns up: A small yellow screwdriver!

Because the handover date of the An2 is approaching, Michael and Toni decide to fly out in the evening.

This way they should arrive in Oklahoma at dawn.

Unfortunately, a thunderstorm forces them to change their plans.

Since this will be a night flight, here are the required switches of the AN2:

The cab light has the normal function again (so no refueling).



You will find the corresponding counters of the Mooney overhead. By the way, the flight with the Mooney starts one hour later, so that you can enjoy a night landing despite the faster flight.

Start of the flight

Trip 7(as planned): High View Farm (61VA) - Oklahoma: Will Rogers World (KOKC)

Because of the thunderstorm: High View Farm (61VA) - Cincinnati (KCVG) 315nm

You're at High View Farm, runway 21.


Take off, climb to 1500m (5000feet) and fly heading 270.

You will immediately notice that the AN2 climbs much faster. No wonder, without extra tanks / fuel the heavy machine has become a lightweight.

After a while Toni notices that they are flying towards a thunderstorm. So the two try to fly around the thunderstorm with heading 290.


Unfortunately, the course correction does not have the desired

effect. The thunderstorm comes closer.

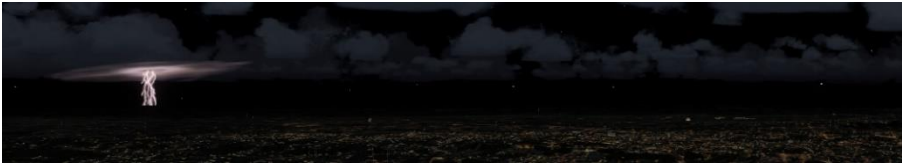

So change of plan: land in Cincinnati
Follow the tower's instructions to the airport.

The airport appears in the distance.

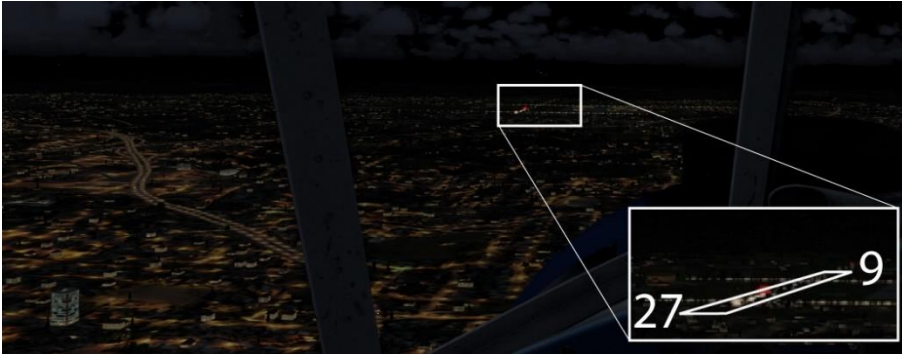


Align with runway 27....



...and land.



Be sure to follow the instructions of the tower.
Failure to do so will have consequences.

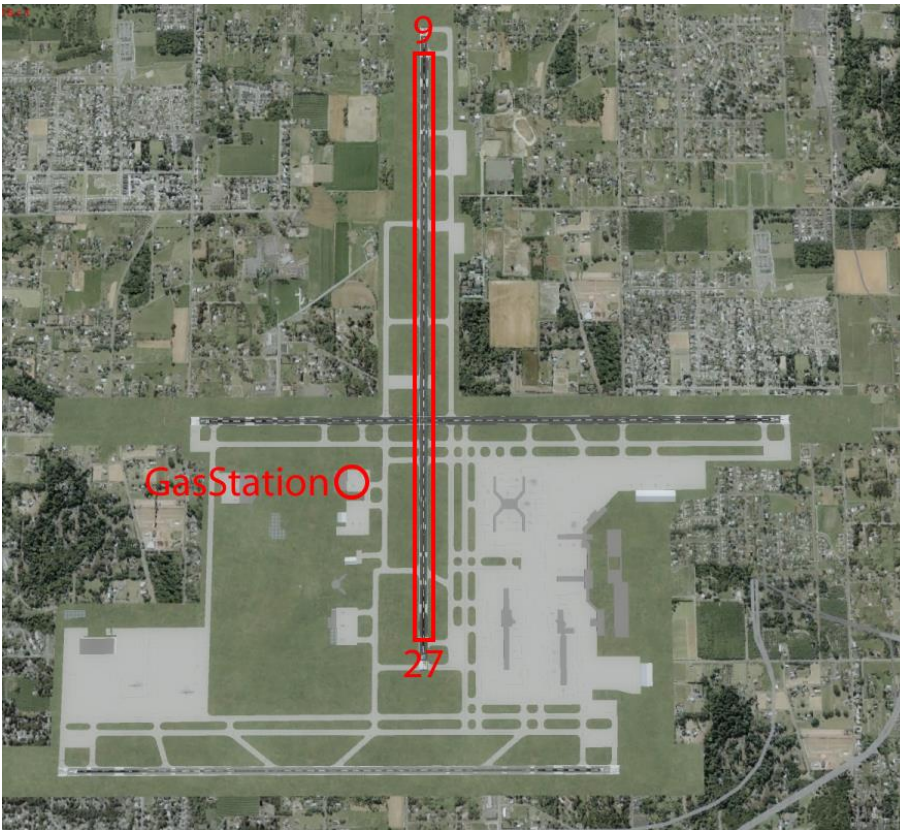

Roll to the gas station.

I hope you enjoyed this flight, if so please give feedback to p3d@andi20.ch . Also send error messages (spelling mistakes, wrong information, etc.) to p3d@andi20.ch, I appreciate any feedback.